


INSTRUCTIONS FOR HT1435BLK — OptiLok

KEY FEATURES:

- Outfitted with either AM or RF Ferrite
- S3 Locking
- The EAS system will alarm if the OptiLok enters its detection field

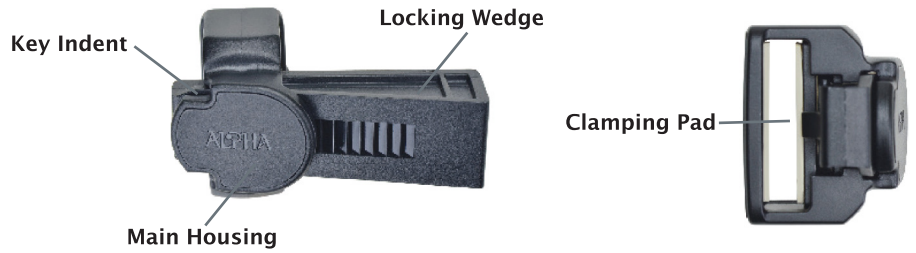

APPLICATION:



1. Make sure the clamping pad is opened all the way. Slide the arm of the eyewear through the opening of the OptiLok with the Locking Wedge facing out.



2. Push the Locking Wedge forward to tighten the Clamping Pad against the arm. An audible clicking noise will be heard.



3. Merchandise is now ready to be displayed.

REMOVAL:



1. Place the Detaching Locator of the HandKey onto the indent on the Main Housing of the OptiLok. The HandKey will be parallel to the arm of the eyewear.



2. While holding the eyewear stationary, begin to push the Locking Wedge forward to disengage the lock. Then push the Locking Wedge back to open the Clamping Pad. Keeping pushing back until the Clamping Pad is fully open.



3. Remove the OptiLok. Eyewear is now ready for sale.

S3 HandKey

Detaching Locators

Super XT Key

Detaching Locators

Caution: Do not place credit cards, ATM cards or magnetic media of any kind near the Super XT Key, as this could erase the magnetic strip.

QUESTIONS?

- | | |
|----------------|----------------|
| North America: | 800.633.2155 |
| Europe: | 34.937.454.857 |
| Latin America: | 800.633.2155 |
| Pacific Rim: | 65.6748.0856 |